


System WFC

Wood screws with countersunk head profile and inset drive.

Material:


Heat treated steel with surface corrosion protection coating



Application:

Used for fixing timber components, timber materials, and steel parts to timber and plywood substrates.

German approval Z-9.1-435

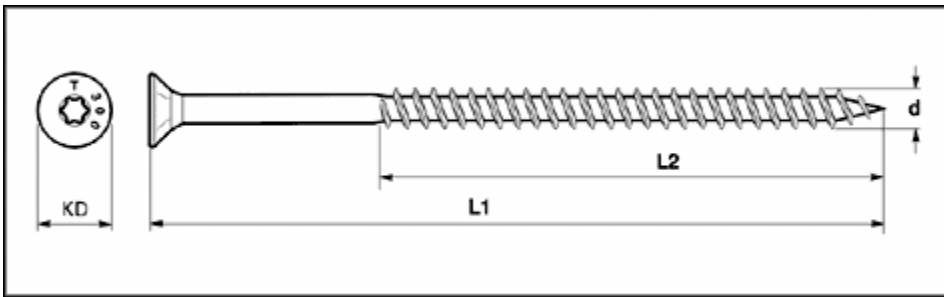



The advantages of System WFC from SFS intec:

- no need to pre-drill
- milled ribs for easy countersinking
- cost saving fast assembly
- special washer increases head strength

Washers:

	thread Ø (mm)	d1	d2	s
Disc Ø 25	8	9,0	25	4,5
Disc Ø 33	10	10,5	33	5,2
Disc Ø 40	12	14,0	40	7,5

Accessories:

Drive shaft	ZA ¼" Universal (60 mm) 
SFS Bit	 T40